

**Industrial P.O.E.**  
**Lite-Managed Ethernet Switch**  
**4+2 PORT Series User's Manual**

**Version 1.4**

•

# **Table of Content**

<b>Getting to Know Your Switch.....</b>	<b>3</b>
1.1    About the 4+2 PORT SERIES Lite-Managed Industrial Switch .....	3
1.2    Software Features .....	3
1.3    Hardware Features.....	3
<b>Hardware Installation.....</b>	<b>4</b>
2.1    Installing Switch on DIN-Rail.....	4
2.1.1    Mount 4+2 PORT Series on DIN-Rail.....	4
2.2    Wall Mounting Installation.....	5
2.2.1    Mount 4+2 PORT Series on wall .....	5
<b>Hardware Overview.....</b>	<b>7</b>
3.1    Front Panel .....	7
3.2    Front Panel LEDs .....	11
3.3    Bottom Panel .....	11
3.4    Rear Panel.....	12
<b>Cables .....</b>	<b>13</b>
4.1    Ethernet Cables .....	13
4.1.1    100BASE-TX/10BASE-T Pin Assignments.....	13
4.2    Fibers.....	14
4.3    SFP .....	15
<b>WEB Management.....</b>	<b>16</b>
5.1    Configuration by Web Browser .....	16
5.1.1    About Web-based Management .....	16
5.1.2    Basic Setting .....	18
5.1.2.1    Switch setting .....	18
5.1.2.2    Admin Password .....	18
5.1.2.3    IP configuration .....	19
5.1.2.4    SNTP Configuration .....	20
5.1.2.5    Backup & Restore .....	23
5.1.2.6    Upgrade Firmware.....	24
5.1.2.7    Factory Default .....	24

5.1.2.8	Reboot.....	24
5.1.3	Port Configuration .....	25
5.1.3.1	Port Control .....	25
5.1.3.2	Port Status .....	26
5.1.4	Redundancy.....	26
5.1.4.1	Fast Recovery Mode .....	26
5.1.4.2	Redundant Ring .....	27
5.1.4.3	RSTP.....	28
5.1.5	SNMP Configuration .....	31
5.1.5.1	SNMP – Agent Setting.....	31
5.1.5.2	SNMP –Trap Setting .....	32
5.1.6	VLAN.....	33
5.1.6.1	VLAN Configuration – Port Based.....	33
5.1.7	Warning.....	34
5.1.7.1	Fault Alarm .....	34
5.1.8	LLDP .....	38
5.1.9	Front Panel .....	39
5.1.10	Power over Ethernet (P.O.E.) .....	39
5.1.11	Auto-Ping Check.....	41
5.1.12	Schedule.....	42
5.1.13	Save Configuration .....	43
<b>Technical Specifications .....</b>		<b>44</b>

# **Getting to Know Your Switch**

## **1.1 About the 4+2 PORT SERIES Lite-Managed Industrial Switch**

The 4+2 PORT series switch are cost-effective and powerful industrial switch with many features. These switches can work under wide temperature and dusty environment and humid condition. 4+2 PORT series support Power over Ethernet, a system to transmit electrical power with data to remote devices over standard twisted-pair cable. Each 4+2 PORT series switch has 4 X 10/100TX PSE (Power Sourcing Equipment) ports which are fully compliant with IEEE 802.3af standard.

The 4+2 PORT series switch can be managed by WEB and a useful Window Utility we called Super-View. Super-View is powerful network management software. With its friendly and powerful interface, you can easily configure multiple switches at the same time, and monitor switches' status

## **1.2 Software Features**

- World's fastest Redundant Ethernet Ring (Recovery time < 10ms over 250 units connection)
- Supports Ring Coupling, Dual Homing and RSTP over Redundant Ring
- Support fast recovery mode
- Easy-to-configure: Web / Windows utility
- Windows utility (Super-View) for network management

## **1.3 Hardware Features**

- Wide Operating Temperature: -40 to 70 °C
- Storage Temperature: -40 to 85 °C
- Operating Humidity: 5% to 95%, non-condensing
- 4 10/100Base-T(X) Ethernet port with PSE provides up to 25 watts
- 10/100Base-T(X) Ethernet port
- 100Base-FX Fiber port / SFP

# **Hardware Installation**

## **2.1 Installing Switch on DIN-Rail**

Each switch has a DIN-Rail kit on rear panel. The DIN-Rail kit helps switch to fix on the DIN-Rail. It is easy to install the switch on the DIN-Rail:

### **2.1.1 Mount 4+2 PORT Series on DIN-Rail**

Step 1: Slant the switch and mount the metal spring to DIN-Rail.



Step 2: Push the switch toward the DIN-Rail until you heard a “click” sound.




## 2.2 Wall Mounting Installation

Each switch has another installation method for users to fix the switch. A wall mount panel can be found in the package. The following steps show how to mount the switch on the wall:

### 2.2.1 Mount 4+2 PORT Series on wall


Step 1: Remove DIN-Rail kit.

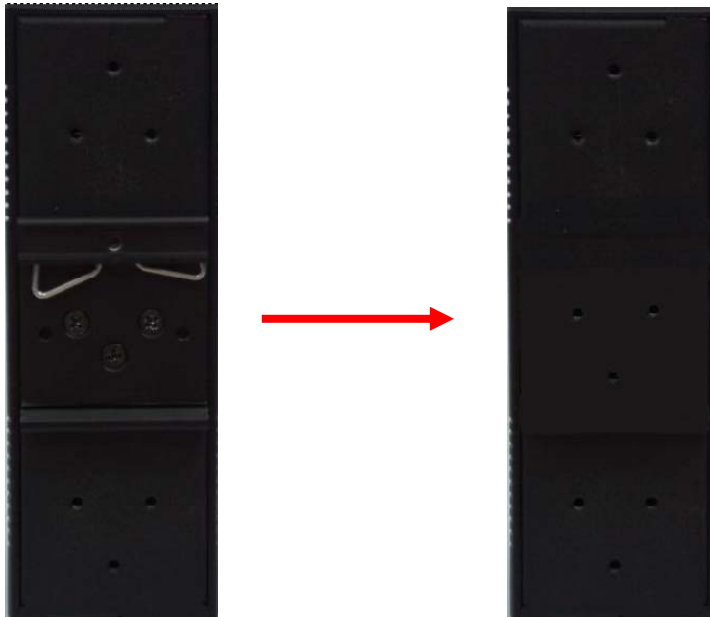

Step 2: Use 6 screws that can be found in the package to combine the wall mount panel. Just like the picture shows below:



The screws specification shows in the following two pictures. In order to prevent switches from any damage, the screws should not larger than the size that used in 4+2 PORT series



# Hardware Overview


## 3.1 Front Panel

The following table describes the labels that stick on the 4+2 PORT series

Port	Description
<b>10/100 RJ-45 fast Ethernet ports</b>	10/100Base-T(X) RJ-45 fast Ethernet ports support auto-negotiation.  Default Setting : Speed: auto Duplex: auto Flow control : disable
<b>Fiber port / SFP Port</b>	100BaseFX
<b>P.O.E. Port</b>	Port 1 ~ 4 contain PSE function compliant with IEEE802.3af P.O.E. specifications.
<b>Reset</b>	Push reset button 2 to 3 seconds to reset the switch.  Push reset button 5 second to reset the switch into <b>Factory Default</b> .




## 4Port POE + 2 Port 10/100M Copper

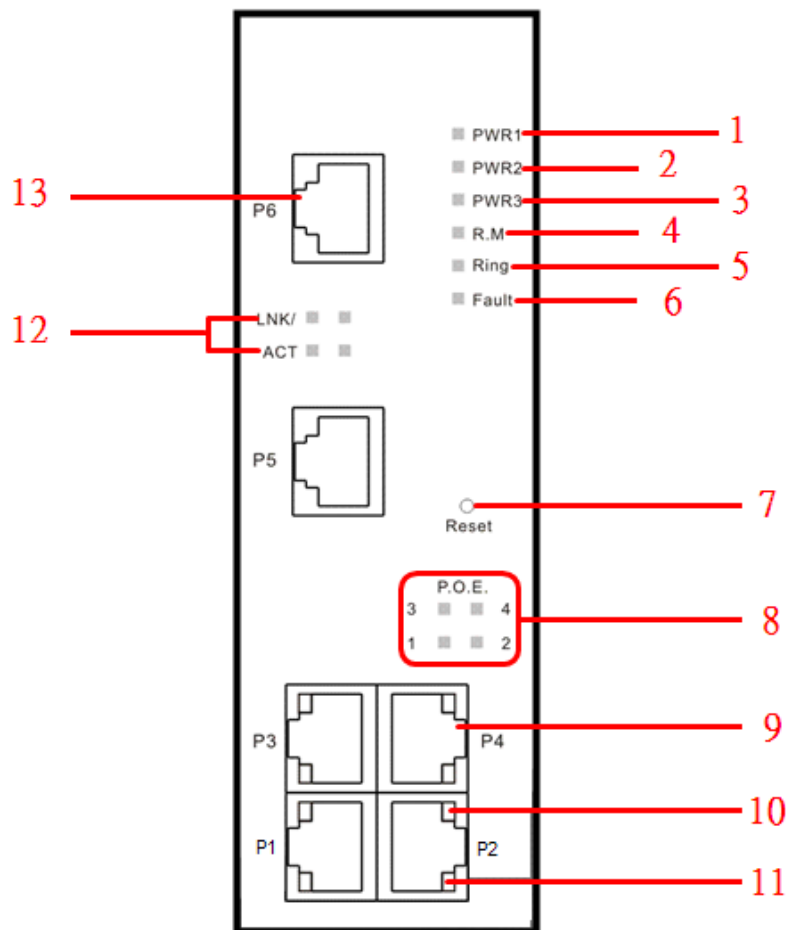


1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of Redundant-Ring.
5. LED for Ring. When the led light on, it means the Redundant-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for Ethernet ACT/LINK status
13. 10/100Base-T(X) Ethernet ports..

## 4Port POE + 2Port 100M Fiber

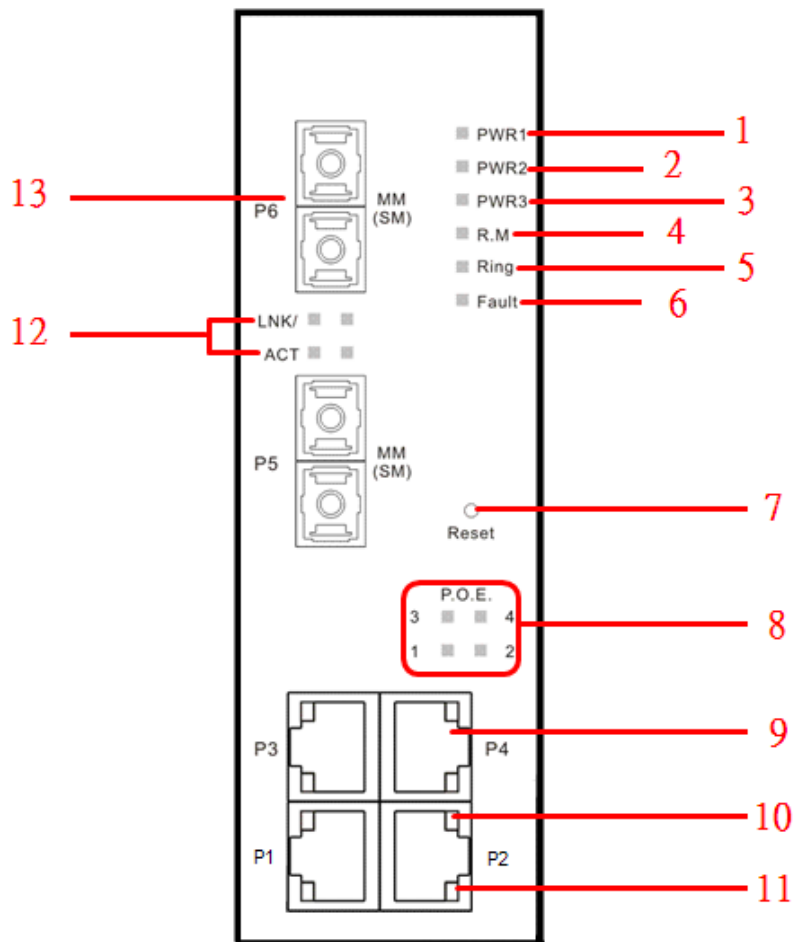

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of Redundant-Ring.
5. LED for Ring. When the led light on, it means the Redundant-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for Fiber ACT/LINK status
13. 100Base-FX Fiber ports..

## 4Port POE + 2Port 100M Fiber SFP

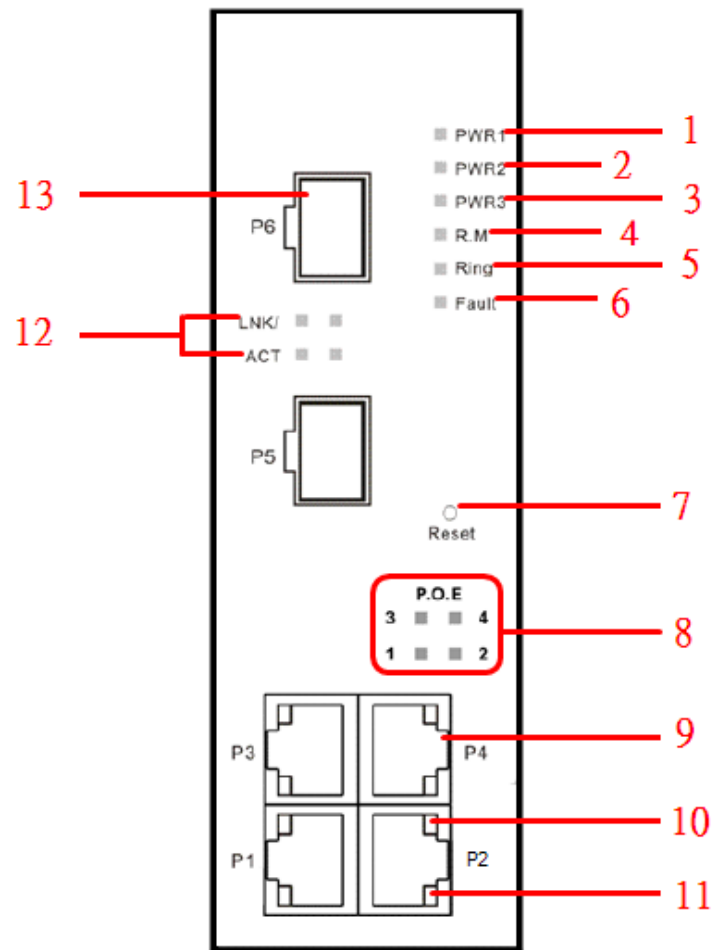

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of Redundant-Ring.
5. LED for Ring. When the led light on, it means the Redundant-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. LED for P.O.E power supplied
9. 10/100Base-T(X) P.S.E. Ethernet ports..
10. LED for Ethernet ACT status
11. LED for Ethernet LINK status
12. LED for SFP ACT/LINK status
13. LED for SFP ports status.


### 3.2 Front Panel LEDs

LED	Color	Status	Description
<b>PWR1</b>	Green	On	DC power module 1 activated.
<b>PWR2</b>	Green	On	DC power module 2 activated.
<b>PWR3</b>	Green	On	Power jack activated.
<b>R.M</b>	Green	On	Redundant-Ring Master.
<b>Ring</b>	Green	On	Redundant-Ring enabled.
		Slowly blinking	Redundant-Ring topology has problem
		Fast blinking	Redundant-Ring work normally.
<b>Fault</b>	Amber	On	Fault relay. Power failure or Port down/fail.
<b>10/100Base-T(X) Fast Ethernet ports</b>			
<b>LNK / ACT</b>	Green	On	Port link up.
		Blinking	Data transmitted.
<b>Link</b>	Amber	On	Port works under Link.
<b>P.O.E.</b>	Green	On	P.O.E. activated
<b>100Base-FX SFP ports</b>			
<b>ACT</b>	Green	Blinking	Data transmitted.
<b>LNK</b>	Amber	On	Port link up.

### 3.3 Bottom Panel

The bottom panel components of 4+2 PORT series are showed as below:

1. Terminal block includes: PWR1, PWR2 (+48V DC) and Relay output (1A@24VDC).
2. Power jack for PWR3 (+48VDC).

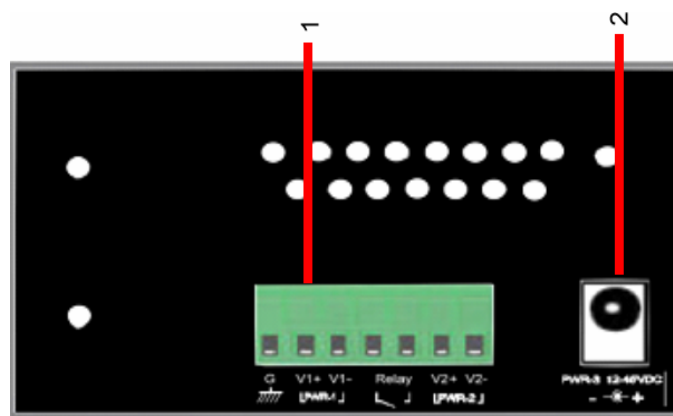


4+2 PORT SERIES power connection

### 3.4 Rear Panel

The rear panel components of 4+2 PORT series are showed as below:

1. Screw holes for wall mount kit.
2. Din-Rail kit

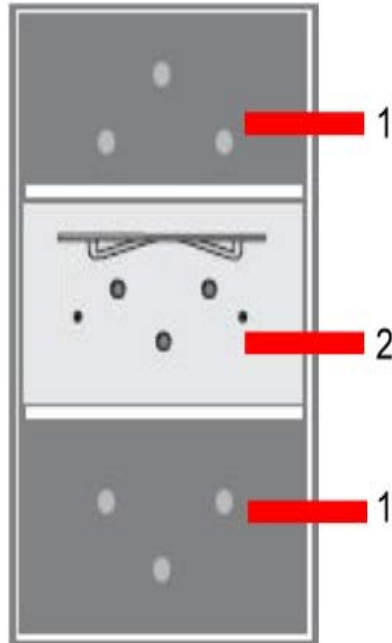

# Cables

## 4.1 Ethernet Cables

The 4+2 PORT series switches have standard Ethernet ports. According to the link type, the switches use CAT 3, 4, 5, 5e UTP cables to connect to any other network device (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	RJ-45

### 4.1.1 100BASE-TX/10BASE-T Pin Assignments

With 100BASE-TX/10BASE-T cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 are used for receiving data.

RJ-45 Pin Assignments

Pin Number	Assignment
1	TD+
2	TD-
3	RD+
4	P.O.E. power input +
5	P.O.E. power input +
6	RD-
7	P.O.E. power input -
8	P.O.E. power input -

The 4+2 PORT series switches support auto MDI/MDI-X operation. You can use a straight-through cable to connect PC and switch. The following table below shows the 10BASE-T/ 100BASE-TX MDI and MDI-X port pin outs.


MDI/MDI-X pins assignment

Pin Number	MDI port	MDI-X port
1	TD+(transmit)	RD+(receive)
2	TD-(transmit)	RD-(receive)
3	RD+(receive)	TD+(transmit)
4	P.O.E. power input +	P.O.E. power input +
5	P.O.E. power input +	P.O.E. power input +
6	RD-(receive)	TD-(transmit)
7	P.O.E. power input -	P.O.E. power input -
8	P.O.E. power input -	P.O.E. power input -

**Note:** "+" and "-" signs represent the polarity of the wires that make up each wire pair.


## 4.2 Fibers

Only models "4+2 port fiber series" have fiber optical ports. The fiber optical ports are in multi-mode and single-mode with SC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

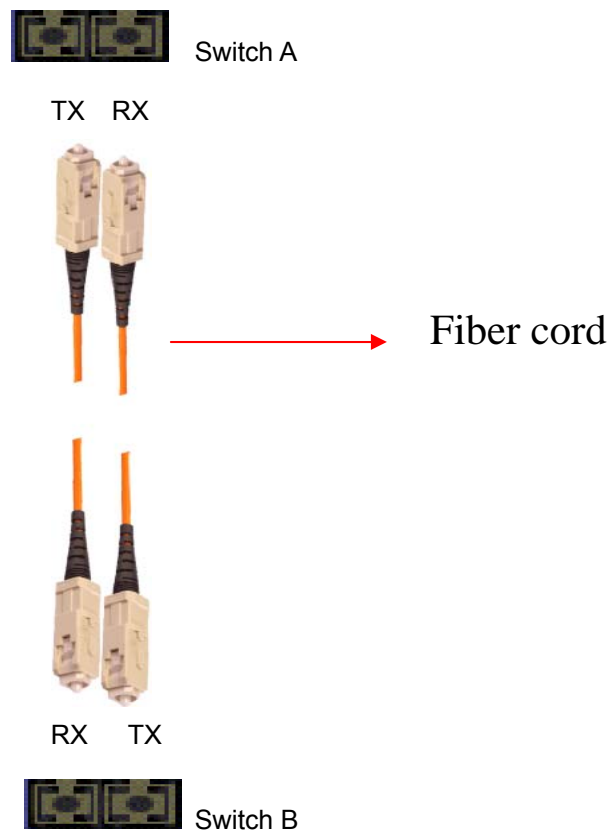

### 4.3 SFP

Only models “4+2 Port SFP” have fiber optical ports with SFP connectors. The fiber optical ports are in multi-mode and single-mode with LC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

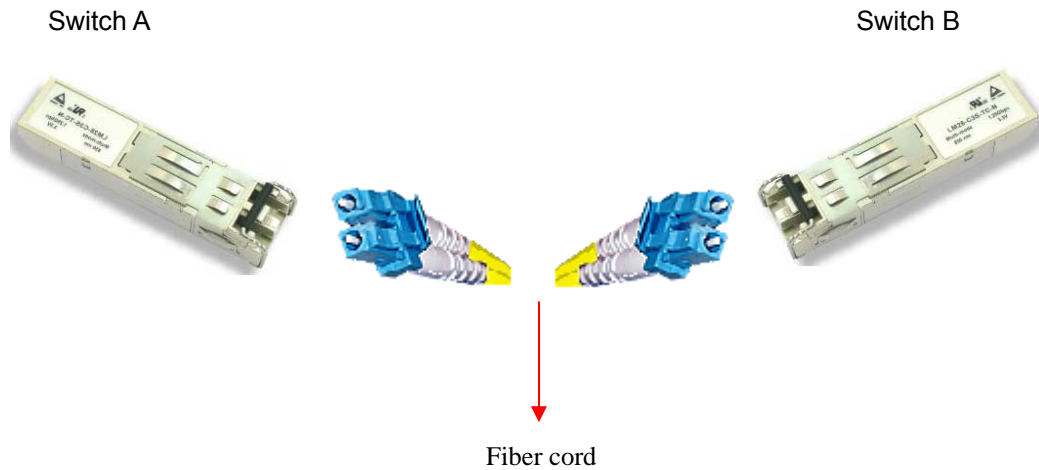



# WEB Management



## 5.1 Configuration by Web Browser

This section introduces the configuration by Web browser.

### 5.1.1 About Web-based Management

An embedded HTML web site resides in flash memory on the CPU board. It contains advanced management features and allows you to manage the switch from anywhere on the network through a standard web browser such as Microsoft Internet Explorer.

The Web-Based Management function supports Internet Explorer 5.0 or later. It is based on Java Applets with an aim to reduce network bandwidth consumption, enhance access speed and present an easy viewing screen.

**Note:** By default, IE5.0 or later version does not allow Java Applets to open sockets. You need to explicitly modify the browser setting in order to enable Java Applets to use network ports.

### Preparing for Web Management

The default value is as below:

IP Address: **192.168.10.1**

Subnet Mask: **255.255.255.0**


Default Gateway: **192.168.10.254**

User Name: **admin**

Password: **admin**

### System Login

1. Launch the Internet Explorer.
2. Type `http://` and the IP address of the switch. Press "**Enter**".

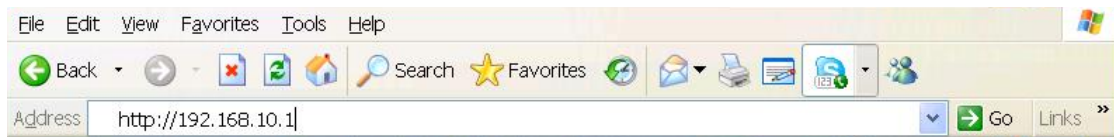


3. The login screen appears.
4. Key in the username and password. The default username and password is **"admin"**.
5. Click **"Enter"** or **"OK"** button, then the main interface of the Web-based management appears.



Login screen

## Main Interface

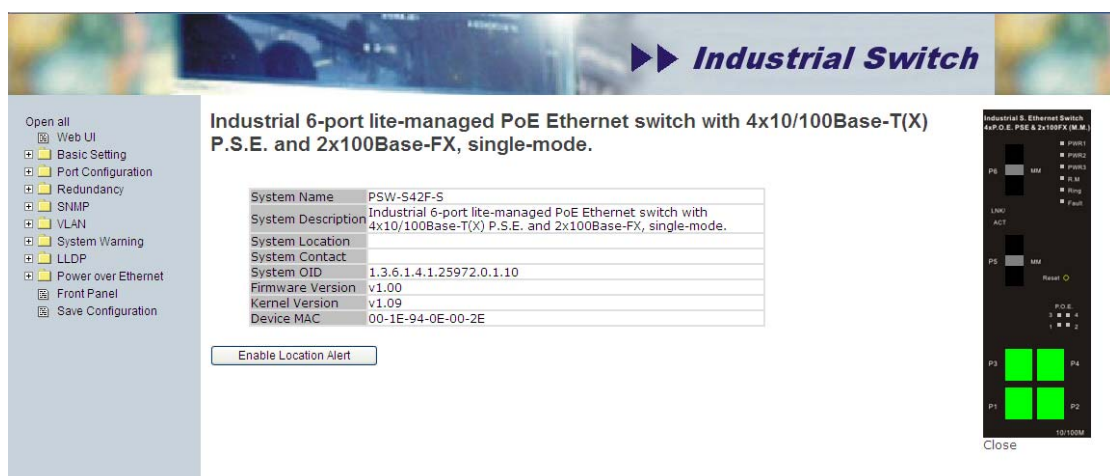

## 5.1.2 Basic Setting

### 5.1.2.1 Switch setting

Switch setting interface

The following table describes the labels in this screen.

Label	Description
<b>System Name</b>	Assign the name of switch. The maximum length is 64 bytes
<b>System Description</b>	Display the description of switch.
<b>System Location</b>	Assign the switch physical location. The maximum length is 64 bytes
<b>System Contact</b>	Enter the name of contact person or organization
<b>Firmware Version</b>	Display the switch's firmware version
<b>Kernel Version</b>	Display the kernel software version
<b>MAC Address</b>	Display the unique hardware address assigned by manufacturer (default)

### 5.1.2.2 Admin Password

Change web management login username and password for the management security issue

#### Admin Password

Admin Password interface

The following table describes the labels in this screen.

Label	Description
<b>User name</b>	Key in the new username (The default is “ <b>admin</b> ”)
<b>New Password</b>	Key in the new password (The default is “ <b>admin</b> ”)
<b>Confirm password</b>	Re-type the new password.
<b>Apply</b>	Click “ <b>Apply</b> ” to activate the configurations.

### 5.1.2.3 IP configuration

You can configure the IP Settings and DHCP client function through IP configuration.

#### IP Configuration

**DHCP Client :** Disable ▾

IP Address	192.168.10.1
Subnet Mask	255.255.255.0
Gateway	192.168.10.254
DNS1	0.0.0.0
DNS2	0.0.0.0

Apply Help

IP Configuration interface

The following table describes the labels in this screen.

Label	Description
<b>DHCP Client</b>	To enable or disable the DHCP client function. When DHCP client function is enabling, the switch will assign the IP address from the network DHCP server. The default IP address will be replaced by the IP address which the DHCP server has assigned. After clicking “ <b>Apply</b> ” button, a popup dialog will show up to inform you when the DHCP client is enabling. The current IP will lose and you should find the new IP on the DHCP server.
<b>IP Address</b>	Assign the IP address that the network is using. If DHCP client function is enabling, you do not need to assign the IP address.

	The network DHCP server will assign the IP address for the switch and it will be displayed in this column. The default IP is 192.168.10.1
<b>Subnet Mask</b>	Assign the subnet mask for the IP address. If DHCP client function is enabling, you do not need to assign the subnet mask.
<b>Gateway</b>	Assign the network gateway for the switch. The default gateway is 192.168.10.254
<b>DNS1</b>	Assign the primary DNS IP address
<b>DNS2</b>	Assign the secondary DNS IP address
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.

#### 5.1.2.4 SNTP Configuration

The SNTP (Simple Network Time Protocol) settings allow you to synchronize switch clocks in the Internet.

#### SNTP Configuration

SNTP Client :

Daylight Saving Time :

UTC Timezone	(GMT+08:00)Taipei <input type="button" value="v"/>
SNTP Server IP Address	192.168.10.66
Current System Time	
Daylight Saving Period	<input type="button" value="v"/> / Jan <input type="button" value="v"/> / 2 <input type="button" value="v"/> 00 <input type="button" value="v"/> ~ <input type="button" value="v"/> / Jan <input type="button" value="v"/> / 2 <input type="button" value="v"/> 00 <input type="button" value="v"/>
Daylight Saving Offset	0 (hours)

SNTP Configuration interface

The following table describes the labels in this screen.

Label	Description
<b>SNTP Client</b>	Enable or disable SNTP function to get the time from the SNTP server.
<b>Daylight Saving Time</b>	Enable or disable daylight saving time function. When daylight saving time is enabling, you need to configure the daylight saving time period.

<b>UTC Time zone</b>	Set the switch location time zone. The following table lists the different location time zone for your reference.
----------------------	---

<b>Local Time Zone</b>	<b>Conversion from UTC</b>	<b>Time at 12:00 UTC</b>
November Time Zone	- 1 hour	11 am
Oscar Time Zone	-2 hours	10 am
ADT - Atlantic Daylight	-3 hours	9 am
AST - Atlantic Standard EDT - Eastern Daylight	-4 hours	8 am
EST - Eastern Standard CDT - Central Daylight	-5 hours	7 am
CST - Central Standard MDT - Mountain Daylight	-6 hours	6 am
MST - Mountain Standard PDT - Pacific Daylight	-7 hours	5 am
PST - Pacific Standard ADT - Alaskan Daylight	-8 hours	4 am
ALA - Alaskan Standard	-9 hours	3 am
HAW - Hawaiian Standard	-10 hours	2 am
Nome, Alaska	-11 hours	1 am
CET - Central European FWT - French Winter MET - Middle European MEWT - Middle European Winter SWT - Swedish Winter	+1 hour	1 pm
EET - Eastern European, USSR Zone 1	+2 hours	2 pm
BT - Baghdad, USSR Zone 2	+3 hours	3 pm

ZP4 - USSR Zone 3	+4 hours	4 pm
ZP5 - USSR Zone 4	+5 hours	5 pm
ZP6 - USSR Zone 5	+6 hours	6 pm
WAST - West Australian Standard	+7 hours	7 pm
CCT - China Coast, USSR Zone 7	+8 hours	8 pm
JST - Japan Standard, USSR Zone 8	+9 hours	9 pm
EAST - East Australian Standard GST Guam Standard, USSR Zone 9	+10 hours	10 pm
IDLE - International Date Line NZST - New Zealand Standard NZT - New Zealand	+12 hours	Midnight

The following table describes the labels in this screen.

Label	Description
<b>SNTP Sever IP Address</b>	Set the SNTP server IP address.
<b>Daylight Saving Period</b>	Set up the Daylight Saving beginning time and Daylight Saving ending time. Both will be different each year.
<b>Daylight Saving Offset</b>	Set up the offset time.
<b>Switch Timer</b>	Display the switch current time.
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.

### 5.1.2.5 Backup & Restore

You can save current EEPROM value of the switch to TFTP server, then go to the TFTP restore configuration page to restore the EEPROM value.

#### Backup & Restore

##### Restore Configuration

TFTP Server IP Address	192.168.10.66
Restore File Name	data.bin

##### Backup Configuration

TFTP Server IP Address	192.168.10.66
Backup File Name	data.bin

Backup & Restore interface

The following table describes the labels in this screen.

Label	Description
<b>TFTP Server IP Address</b>	Fill in the TFTP server IP
<b>Restore File Name</b>	Fill the file name.
<b>Restore</b>	Click “ <b>restore</b> ” to restore the configurations.
<b>Restore File Name</b>	Fill the file name.
<b>Restore</b>	Click “ <b>restore</b> ” to restore the configurations.
<b>Backup</b>	Click “ <b>backup</b> ” to backup the configurations.



### 5.1.2.6 Upgrade Firmware

Upgrade Firmware allows you to update the switch firmware. Before updating, make sure you have your TFTP server ready and the firmware image is on the TFTP server.

#### Upgrade Firmware

TFTP Server IP	<input type="text" value="192.168.10.66"/>
Firmware File Name	<input type="text" value="image.bin"/>

Update Firmware interface

### 5.1.2.7 Factory Default

#### Factory Default

- ☒ Keep current IP address setting?  
☒ Keep current username & password?

Factory Default interface

Reset switch to default configuration. Click  to reset all configurations to the default value. You can select “**Keep current IP address setting**” and “**Keep current username & password**” to prevent IP and username & password from default.

### 5.1.2.8 Reboot

#### System Reboot

Please click [\[Reboot\]](#) button to restart switch device.

System Reboot interface

## 5.1.3 Port Configuration

### 5.1.3.1 Port Control

By this function, you can set the state, speed/duplex, flow control, and security of the port.

#### Port Control

Port No.	State	Speed/Duplex	Flow Control
Port.01	Enable ▼	AutoNegotiation ▼	Disable ▼
Port.02	Enable ▼	AutoNegotiation ▼	Disable ▼
Port.03	Enable ▼	AutoNegotiation ▼	Disable ▼
Port.04	Enable ▼	AutoNegotiation ▼	Disable ▼
Port.05	Enable ▼	100 Full ▼	Disable ▼
Port.06	Enable ▼	100 Full ▼	Disable ▼

Port Control interface

The following table describes the labels in this screen.

Label	Description
<b>Port NO.</b>	Port number for setting.
<b>State</b>	Enable/Disable the port.
<b>Speed/Duplex</b>	You can set Auto-negotiation, 100 full,100 half,10 full,10 half mode.
<b>Flow Control</b>	Support symmetric and asymmetric mode to avoid packet loss when congestion occurred.
<b>Apply</b>	Click “ <b>Apply</b> ” to activate the configurations.

### 5.1.3.2 Port Status

The following information provides the current port status.

#### Port Status

Port No.	Type	Link	State	Speed/Duplex	Flow Control
Port.01	100TX	Down	Enable	N/A	N/A
Port.02	100TX	UP	Enable	100 Full	Disable
Port.03	100TX	Down	Enable	N/A	N/A
Port.04	100TX	Down	Enable	N/A	N/A
Port.05	100FX	Down	Enable	N/A	N/A
Port.06	100FX	Down	Enable	N/A	N/A

Port Status interface

## 5.1.4 Redundancy

### 5.1.4.1 Fast Recovery Mode

The Fast Recovery Mode can be set to connect multiple ports to one or more switches.

The 4+2 PORT SERIES SERIES with its fast recovery mode will provide redundant links.

Fast Recovery mode supports 4 priorities, only the first priority will be the act port, the other ports configured with other priority will be the backup ports.

#### Fast Recovery Mode

<input checked="" type="checkbox"/> Active	
Port.01	1st Priority <span>▼</span>
Port.02	2nd Priority <span>▼</span>
Port.03	3rd Priority <span>▼</span>
Port.04	Not included <span>▼</span>
Port.05	5th Priority <span>▼</span>
Port.06	4th Priority <span>▼</span>

Apply

Fast Recovery Mode interface

The following table describes the labels in this screen.

Label	Description
<b>Active</b>	Activate the fast recovery mode.
<b>port</b>	Port can be configured as 5 priorities. Only the port with highest priority will be the active port. 1st Priority is the highest.
<b>Apply</b>	Click “ <b>Apply</b> ” to activate the configurations.


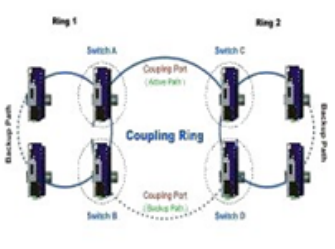
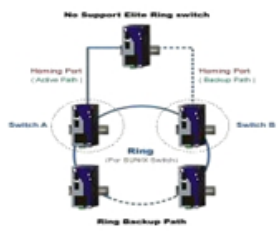
### 5.1.4.2 Redundant Ring

Redundant Ring is one of the most powerful Redundant Ring technology in the world.

The recovery time of Redundant Ring is less than 10 mS over 250 units of connections.

It can reduce unexpected malfunction caused by network topology change. Redundant Ring technology supports three Ring topologies for network redundancy: Redundant Ring, Coupling Ring and Dual Homing.

#### Redundant Ring

<input checked="" type="checkbox"/> Redundant Ring	<input type="checkbox"/> Coupling Ring	<input type="checkbox"/> Dual Homing
		
Ring Master: <span>Disable</span> <input type="button" value="v"/> 1st Ring Port: <span>Port.01</span> <input type="button" value="v"/> 2nd RingPort: <span>Port.02</span> <input type="button" value="v"/>	Coupling Port: <span>Port.03</span> <input type="button" value="v"/>	Homing Port: <span>Port.05</span> <input type="button" value="v"/>

Redundant Ring interface

The following table describes the labels in this screen.

Label	Description
<b>Redundant Ring</b>	Mark to enable Redundant Ring.
<b>Ring Master</b>	There should be one and only one Ring Master in a ring. However if there are two or more switches which set Ring Master to enable, the switch with the lowest MAC address will be the actual Ring Master and others will be Backup Masters.

<b>1<sup>st</sup> Ring Port</b>	The primary port, when this switch is Ring Master.
<b>2<sup>nd</sup> Ring Port</b>	The backup port, when this switch is Ring Master.
<b>Coupling Ring</b>	Mark to enable Coupling Ring. Coupling Ring can be used to divide a big ring into two smaller rings to avoid effecting all switches when network topology change. It is a good application for connecting two Redundant Rings.
<b>Coupling Port</b>	Link to Coupling Port of the switch in another ring. Coupling Ring need four switch to build an active and a backup link. Set a port as coupling port. The coupled four ports of four switches will be run at active/backup mode.
<b>Control Port</b>	Link to Control Port of the switch of the same ring. Control Port used to transmit control signals.
<b>Dual Homing</b>	Mark to enable Dual Homing. By selecting Dual Homing mode, Redundant Ring will be connected to normal switches through two RSTP links (ex: backbone Switch). The two links work as active/backup mode, and connect each Redundant Ring to the normal switches in RSTP mode.
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.

**Note:** We don't suggest you to set one switch as a Ring Master and a Coupling Ring at the same time due to heavy load.

### 5.1.4.3 RSTP

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol. It provides faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

#### RSTP setting

You can enable/disable the RSTP function, and set the parameters for each port.

## RSTP Setting

<b>RSTP Mode</b>		Enable ▾
<b>Bridge Configuration</b>		
Priority (0-61440)	32768 ▾	
Max Age Time(6-40)	20	
Hello Time (1-10)	2	
Forward Delay Time (4-30)	15	

<b>Port Configuration</b>					
Port	Path Cost (1-2000000000)	Priority (0-240)	Admin P2P	Admin Edge	Admin Non STP
1	200000	128	Auto ▾	True ▾	False ▾
2	200000	128	Auto ▾	True ▾	False ▾
3	200000	128	Auto ▾	True ▾	False ▾
4	200000	128	Auto ▾	True ▾	False ▾
5	200000	128	Auto ▾	True ▾	False ▾
6	200000	128	Auto ▾	True ▾	False ▾

RSTP Setting interface

The following table describes the labels in this screen.

Label	Description
<b>RSTP mode</b>	You must enable or disable RSTP function before configuring the related parameters.
<b>Priority (0-61440)</b>	A value used to identify the root bridge. The bridge with the lowest value has the highest priority and is selected as the root. If the value changes, you must reboot the switch. The value must be multiple of 4096 according to the protocol standard rule.
<b>Max Age (6-40)</b>	The number of seconds a bridge waits without receiving Spanning-tree Protocol configuration messages before attempting a reconfiguration. Enter a value between 6 through 40.
<b>Hello Time (1-10)</b>	The time that controls switch sends out the BPDU packet to check RSTP current status. Enter a value between 1 through 10.

<b>Forwarding Delay Time (4-30)</b>	The number of seconds a port waits before changing from its Rapid Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a value between 4 through 30.
<b>Path Cost (1-200000000)</b>	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number 1 through 200000000.
<b>Priority (0-240)</b>	Decide which port should be blocked by priority in LAN. Enter a number 0 through 240. The value of priority must be the multiple of 16
<b>Admin P2P</b>	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port concerned can only be connected to exactly one other bridge (i.e. It is served by a point-to-point LAN segment), or it can be connected to two or more bridges (i.e. It is served by a shared medium LAN segment). This function allows the P2P status of the link to be manipulated administratively. <b>True</b> means P2P enabling. <b>False</b> means P2P disabling.
<b>Admin Edge</b>	The port is directly connected to end stations, and it cannot create bridging loop in the network. To configure the port as an edge port, set the port to " <b>True</b> ".
<b>Admin Non STP</b>	The port includes the STP mathematic calculation. <b>True</b> is not including STP mathematic calculation. <b>False</b> is including the STP mathematic calculation.
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.

**NOTE:** Follow the rule to configure the MAX Age, Hello Time, and Forward Delay Time:

$$2 \times (\text{Forward Delay Time value} - 1) \geq \text{Max Age value} \geq 2 \times (\text{Hello Time value} + 1)$$

### RSTP Information

Show RSTP algorithm result at this table.

## RSTP Information

### Root Bridge Information

Bridge ID	0080001E94140054
Root Priority	32768
Root Port	Root
Root Path Cost	0
Max Age Time	20
Hello Time	2
Forward Delay Time	15

### Port Information

Port	Path Cost	Port Priority	OperP2P	OperEdge	STP Neighbor	State	Role
Port.01	200000	128	True	True	False	Forwarding	Designated
Port.02	200000	128	True	True	False	Disabled	Disabled
Port.03	200000	128	True	True	False	Disabled	Disabled
Port.04	200000	128	True	True	False	Disabled	Disabled
Port.05	200000	128	True	True	False	Disabled	Disabled
Port.06	200000	128	True	True	False	Disabled	Disabled

RSTP Information interface

## 5.1.5 SNMP Configuration

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.

### 5.1.5.1 SNMP – Agent Setting

You can set SNMP agent related information by Agent Setting Function.

#### SNMP - Agent Setting

Community String	Privilege
public	Read Only
private	Read and Write
	Read Only
	Read Only

Apply Help

SNMP – Agent Setting interface

The following table describes the labels in this screen.



Label	Description
<b>SNMP – Agent Setting</b>	SNMP Community should be set for SNMP. Four sets of "Community String/Privilege" are supported. Each Community String is maximum 32 characters. Keep empty to remove this Community string.

### 5.1.5.2 SNMP –Trap Setting

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps will issue. Create a trap manager by entering the IP address of the station and a community string. To define management stations as trap manager and enter SNMP community strings and selects the SNMP version.

#### SNMP - Trap Setting

##### Trap Server Setting

Server IP	<input type="text"/>
Community	<input type="text"/>
Trap Version	<input checked="" type="radio"/> V1 <input type="radio"/> V2c
<input type="button" value="Add"/>	

##### Trap Server Profile

Server IP	Community	Trap Version
192.168.10.66:	public	v1
<input type="button" value="Remove"/>		
<input type="button" value="Help"/>		

SNMP –Trap Setting interface

The following table describes the labels in this screen.

Label	Description
<b>Server IP</b>	The server IP address to receive Trap
<b>Community</b>	Community for authentication
<b>Trap Version</b>	Trap Version supports V1 and V2c.
<b>Add</b>	Add trap server profile.

<b>Remove</b>	Remove trap server profile.
<b>Help</b>	Show help file.

## 5.1.6 VLAN

A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain, which allows you to isolate network traffic. Only the members of the VLAN will receive traffic from the same members of VLAN. Basically, creating a VLAN from a switch is logically equivalent of reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plugged into the same switch physically.

The switch supports port-based VLAN only.

### 5.1.6.1 VLAN Configuration – Port Based

Traffic is forwarded to the member ports of the same vlan group. vlan port based startup, set in the same group of the port, can be a normal transmission packet, without restricting the types of packets.

#### Port-Based VLAN

	Port.01	Port.02	Port.03	Port.04	Port.05	Port.06
Group.1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Group.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

VLAN Configuration – Port Based VLAN interface

The following table describes the labels in this screen.

Label	Description
<b>Group</b>	Mark the blank to assign the port into VLAN group.
<b>Apply</b>	Click “ <b>Apply</b> ” to activate the configurations.
<b>Help</b>	Show help file.

## 5.1.7 Warning

Warning function is very important for managing switch. You can manage switch by SYSLOG, E-MAIL, and Fault Relay. It helps you to monitor the switch status on remote site. When events occurred, the warning message will send to your appointed server, E-MAIL, or relay fault to switch panel.

### 5.1.7.1 Fault Alarm

When any selected fault event is happened, the Fault LED in switch panel will light up and the electric relay will signal at the same time.

**Fault Alarm**

**Power Failure**

☐ PWR 1 ☒ PWR 2

**Port Link Down/Broken**

☐ Port 1 ☐ Port 2

☐ Port 3 ☐ Port 4

☒ Port 5 ☐ Port 6

Fault alarm interface

### System Warning – SYSLOG Setting

The SYSLOG is a protocol to transmit event notification messages across networks.

Please refer to RFC 3164 - The BSD SYSLOG Protocol

### System Warning - SYSLOG Setting

SYSLOG Mode Both

SYSLOG Server IP Address 192.168.10.66

System Warning – SYSLOG Setting interface

The following table describes the labels in this screen.

Label	Description
<b>SYSLOG Mode</b>	<ul style="list-style-type: none"><li>■ <b>Disable:</b> disable SYSLOG.</li><li>■ <b>Client Only:</b> log to local system.</li><li>■ <b>Server Only:</b> log to a remote SYSLOG server.</li><li>■ <b>Both:</b> log to both of local and remote server.</li></ul>
<b>SYSLOG Server IP Address</b>	The remote SYSLOG Server IP address.
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.
<b>Help</b>	Show help file.

### System Event LOG

If system log client is enabled, the system event logs will show in this table.

## System Warning - SYSLOG List

1: Jan 1 02:00:27 : System Log Enable!  
2: Jan 1 02:00:27 : System Log Server IP: 192.168.10.66

Page.1 ▼

[Reload](#) [Clear](#) [Help](#)

System event log interface

The following table describes the labels in this screen.

Label	Description
<b>Page</b>	Select LOG page.
<b>Reload</b>	To get the newest event logs and refresh this page.
<b>Clear</b>	Clear log.
<b>Help</b>	Show help file.

### System Warning – SMTP Setting

The SMTP is Short for Simple Mail Transfer Protocol. It is a protocol for e-mail transmission across the Internet. Please refer to RFC 821 - Simple Mail Transfer Protocol.

## System Warning - SMTP Setting

E-mail Alert : Enable 

### SMTP Configuration

SMTP Server IP Address	<input type="text" value="192.168.10.66"/>
Sender E-mail Address	<input type="text"/>
Mail Subject	<input type="text" value="Automated Email Alert"/>
<input type="checkbox"/> Authentication	
Recipient E-mail Address 1	<input type="text" value="jim@192.168.10.66"/>
Recipient E-mail Address 2	<input type="text"/>
Recipient E-mail Address 3	<input type="text"/>
Recipient E-mail Address 4	<input type="text"/>

Apply Help

System Warning – SMTP Setting interface

The following table describes the labels in this screen.

Label	Description
<b>E-mail Alarm</b>	Enable/Disable transmission system warning events by e-mail.
<b>Sender E-mail Address</b>	The SMTP server IP address
<b>Mail Subject</b>	The Subject of the mail
<b>Authentication</b>	<input checked="" type="checkbox"/> <b>Username:</b> the authentication username.

	<ul style="list-style-type: none"> <li>■ <b>Password:</b> the authentication password.</li> <li>■ <b>Confirm Password:</b> re-enter password.</li> </ul>
<b>Recipient E-mail Address</b>	The recipient's E-mail address. It supports up to 6 recipients per mail.
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.
<b>Help</b>	Show help file.

### System Warning – Event Selection

SYSLOG and SMTP are the two warning methods that supported by the system.

Check the corresponding box to enable system event warning method you wish to choose. Please note that the checkbox can not be checked when SYSLOG or SMTP is disabled.

## System Warning - Event Selection

### System Event

Event	SYSLOG	SMTP
System Cold Start	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Redundant Ring Topology Change	<input type="checkbox"/>	<input checked="" type="checkbox"/>

### Port Event

Port No.	SYSLOG	SMTP
Port.01	Disable <input type="button" value="v"/>	Link Up & Link Down <input type="button" value="v"/>
Port.02	Disable <input type="button" value="v"/>	Disable <input type="button" value="v"/>
Port.03	Link Down <input type="button" value="v"/>	Disable <input type="button" value="v"/>
Port.04	Disable <input type="button" value="v"/>	Disable <input type="button" value="v"/>
Port.05	Disable <input type="button" value="v"/>	Link Down <input type="button" value="v"/>
Port.06	Link Up & Link Down <input type="button" value="v"/>	Disable <input type="button" value="v"/>

System Warning – Event Selection interface

The following table describes the labels in this screen.

Label	Description
<b>System Event</b>	
<b>System Cold Start</b>	Alert when system restart

<b>Redundant Ring Topology Change</b>	Alert when Redundant Ring topology change
<b>Port Event</b>	<ul style="list-style-type: none"> <li>■ <b>Disable</b></li> <li>■ <b>Link Up</b></li> <li>■ <b>Link Down</b></li> <li>■ <b>Link Up &amp; Link Down</b></li> </ul>
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.
<b>Help</b>	Show help file.

### 5.1.8 LLDP

LLDP (Link Layer Discovery Protocol) function allows the switch to advertise its information to other nodes on the network and store the information it discovers.

#### LLDP Configuration

LLDP Protocol:	<div style="border: 1px solid #ccc; padding: 2px 5px;">Enable ▼</div>
LLDP Interval:	<div style="border: 1px solid #ccc; padding: 2px 5px;">30</div> sec

Apply

Help


LLDP interface

The following table describes the labels in this screen.

Label	Description
<b>LLDP Protocol</b>	"Enable" or "Disable" LLDP function.
<b>LLDP Interval</b>	The interval of resend LLDP (by default at 30 seconds)
<b>Apply</b>	Click " <b>Apply</b> " to activate the configurations.
<b>Help</b>	Show help file.

### 5.1.9 Front Panel

Show 4+2 PORT SERIES panel. Click **“Close”** to close panel on web.

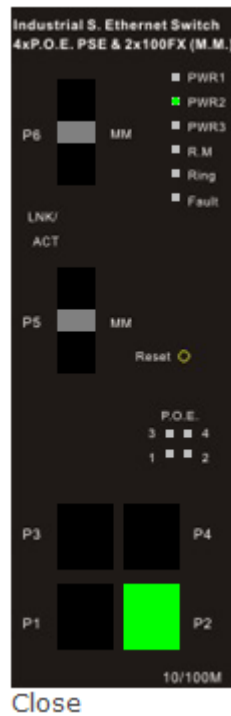

Front panel interface

### 5.1.10 Power over Ethernet (P.O.E.)

The following interface is the PoE setting interface. There are 4 ports (port 1 to port 4) act as PSE (Power Supply Equipment) ports.

#### Power over Ethernet

Maximum Power Available	120	W
Actual Power Consumption	0	W
Port Knockoff Disabled	<input checked="" type="checkbox"/>	
AC Disconnect	<input checked="" type="checkbox"/>	
Capacitive Detection	<input type="checkbox"/>	

Apply



The following table describes the labels in this screen.

Label	Description
<b>Maximum Power Available</b>	Display the maximum power available.
<b>Actual Power Consumption</b>	Display the actual power consumption.
<b>Port Knockoff Disabled</b>	Mark the blank to enable "Pork Knock off Disabled" function.
<b>AC Disconnect</b>	Mark the blank to enable " <b>AC Disconnect</b> " function.
<b>Capacitive Detection</b>	Mark the blank to enable " <b>Capacitive Detection</b> " function

Port	Enable State	Power Limit From Classification	Legacy	Priority	Power Limit (<25000) (mW)	Mode	Current (mA)	Voltage (V)	Power (mW)	Determined Class
1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Null	0	0.0	0	0:15.4W
2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Detecting	0	0.0	0	0:15.4W
3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Detecting	0	0.0	0	0:15.4W
4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Detecting	0	0.0	0	0:15.4W

P.S.E. port control setting interface

The following table describes the labels in this screen.

Label	Description
<b>Port</b>	Port number.
<b>Enable state</b>	Mark the blank to enable P.O.E. function for specific ports
<b>Power Limit From Classification</b>	Set the " <b>Power Limit From Classification</b> " function for each P.O.E. ports
<b>Legacy</b>	The legacy detection is to identify the PD devices that did not follow the IEEE 802.3af standard their unique electrical signatures in order for the PoE switch can provide the power to those PD devices
<b>Priority</b>	Set port priority for the P.O.E. power management. 1 = C (critical), 2 = H (High), 3 = L (Low)
<b>Power Limit</b>	Set the power limit value. The maximum value must less 15400
<b>Mode</b>	Display the PD current operation mode status
<b>Current(mA)</b>	Display current value
<b>Voltage(V)</b>	Display voltage value
<b>Power(mW)</b>	Display watt value

<b>Determined Class</b>	Display power class. When the Bypass classification enable, the class value will not show in here
-------------------------	---

### 5.1.11 Auto-Ping Check

You can control the POE function by using the ping command , in order to turn on or off other POE device which connect with port assign.

#### Auto-Ping Check

**Ping Check:**  ▾

**Send Mail :**  ▾

Port	Ping IP Address	Interval Time (10~120) seconds	Retry Time (1~5)	Failure Log	Failure Action	Reboot Time (3~120) seconds
1	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="text" value="Nothing"/> ▾	<input type="text" value="15"/>
2	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="text" value="Nothing"/> ▾	<input type="text" value="15"/>
3	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="text" value="Nothing"/> ▾	<input type="text" value="15"/>
4	<input type="text" value="0.0.0.0"/>	<input type="text" value="30"/>	<input type="text" value="3"/>	error=0 total=0	<input type="text" value="Nothing"/> ▾	<input type="text" value="15"/>

The following table describes the labels in this screen.

Label	Description
<b>Ping Check</b>	Enable or disable Ping Check function
<b>Send Mail</b>	When " ping " fails, can notify users by mail
<b>Port</b>	You can appoint to want to control P.O.E port number
<b>Ping IP Address</b>	Set up IP Address
<b>Interval Time</b>	Spacing interval to set up Ping
<b>Retry Time</b>	Set up the number of times of ping
<b>Failure Log</b>	The number of errors
<b>Failure Action</b>	Set up movements wanted to carry out
<b>Reboot Time</b>	Ping check waiting time (wait device reboot to start time )

### 5.1.12 Schedule

User can appointed date and time, Enable or Close Power Over Ethernet Function, switch can with according to the time when is set up, carry on the designated movements (SNTP Function must Enable)

**Power over Ethernet - Schedule**

Schedule on Port.01 ▼

Schedule mode Disable ▼

☐ Select all

Hour	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
01	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
02	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
03	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
04	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
05	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
06	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
07	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
08	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
09	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
11	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
12	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
13	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
16	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
17	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
18	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
19	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
21	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
22	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
23	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Apply

NOTE:SNTP must enable.


The following table describes the labels in this screen.

Label	Description
<b>Schedule on</b>	Setting action port
<b>Schedule mode</b>	Schedule mode enable or disable
<b>Select all</b>	Select all Data & Time
<b>Hour</b>	Set up enable Time
<b>Sunday~Saturday</b>	Set up enable Data

### 5.1.13 Save Configuration

If any configuration changed, “**Save Configuration**” should be clicked to save current configuration data into the permanent flash memory. Otherwise, the current configuration will be lost when power off or system reset.

#### Save Configuration



System Configuration interface

The following table describes the labels in this screen.

Label	Description
<b>Save</b>	Save all configurations.
<b>Help</b>	Show help file.

# Technical Specifications

Technology	
Ethernet Standards	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3x Flow Control and Back pressure IEEE802.3af Power over Ethernet specification IEEE802.1D Spanning tree protocol IEEE802.1w Rapid Spanning tree protocol IEEE802.1AB LLDP
MAC addresses	2048
Flow Control	IEEE 802.3x Flow Control and Back-pressure
VLAN	Port based
Processing	Store-and-Forward
Firmware upgrade	TFTP
Ring redundancy	RSTP Redundant Ring Couple Ring Dual Homing Fast recovery
Interface	
RJ45 Ports	10/100Base-T(X), Auto MDI/MDI-X (4x P.O.E. PSE)
Fiber Ports	100 Base-FX(SC Connector) Multi-Mode: 0 to 2 km, 1310 nm (50/125 $\mu$ m to 62.5/125 $\mu$ m) Single-Mode: 0 to 30 km, 1310 nm (9/125 $\mu$ m)
LED Indicators	Per Unit : Power x 3(Green) RJ45 Ports: Per Port : Link/Activity(Green/Blinking Green), Link(Amber) P.O.E. LED: P.O.E. power supplied(Green) Fiber Ports: Per Port : Activity(Green), Link (Amber)
Power Requirements	
Power Input Voltage	PWR1/2: +48V DC in 7 pin Terminal block

	PWR3: +48VDC in Power Jack
Reverse Polarity Protection	Present
Power Consumption	7 Watts (Power supplied for PD not included)
<b>Environmental</b>	
Wide Operating Temperature	-40 to 70°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%, non-condensing
<b>Mechanical</b>	
Dimensions(W x D x H)	52 mm(W)x 106 mm( D )x 144 mm(H)
Casing	IP-30 protection
<b>Regulatory Approvals</b>	
Regulatory Approvals	FCC Part 15, CISPER (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
<b>Warranty</b>	5 years